

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**


Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problem Mailbox.**

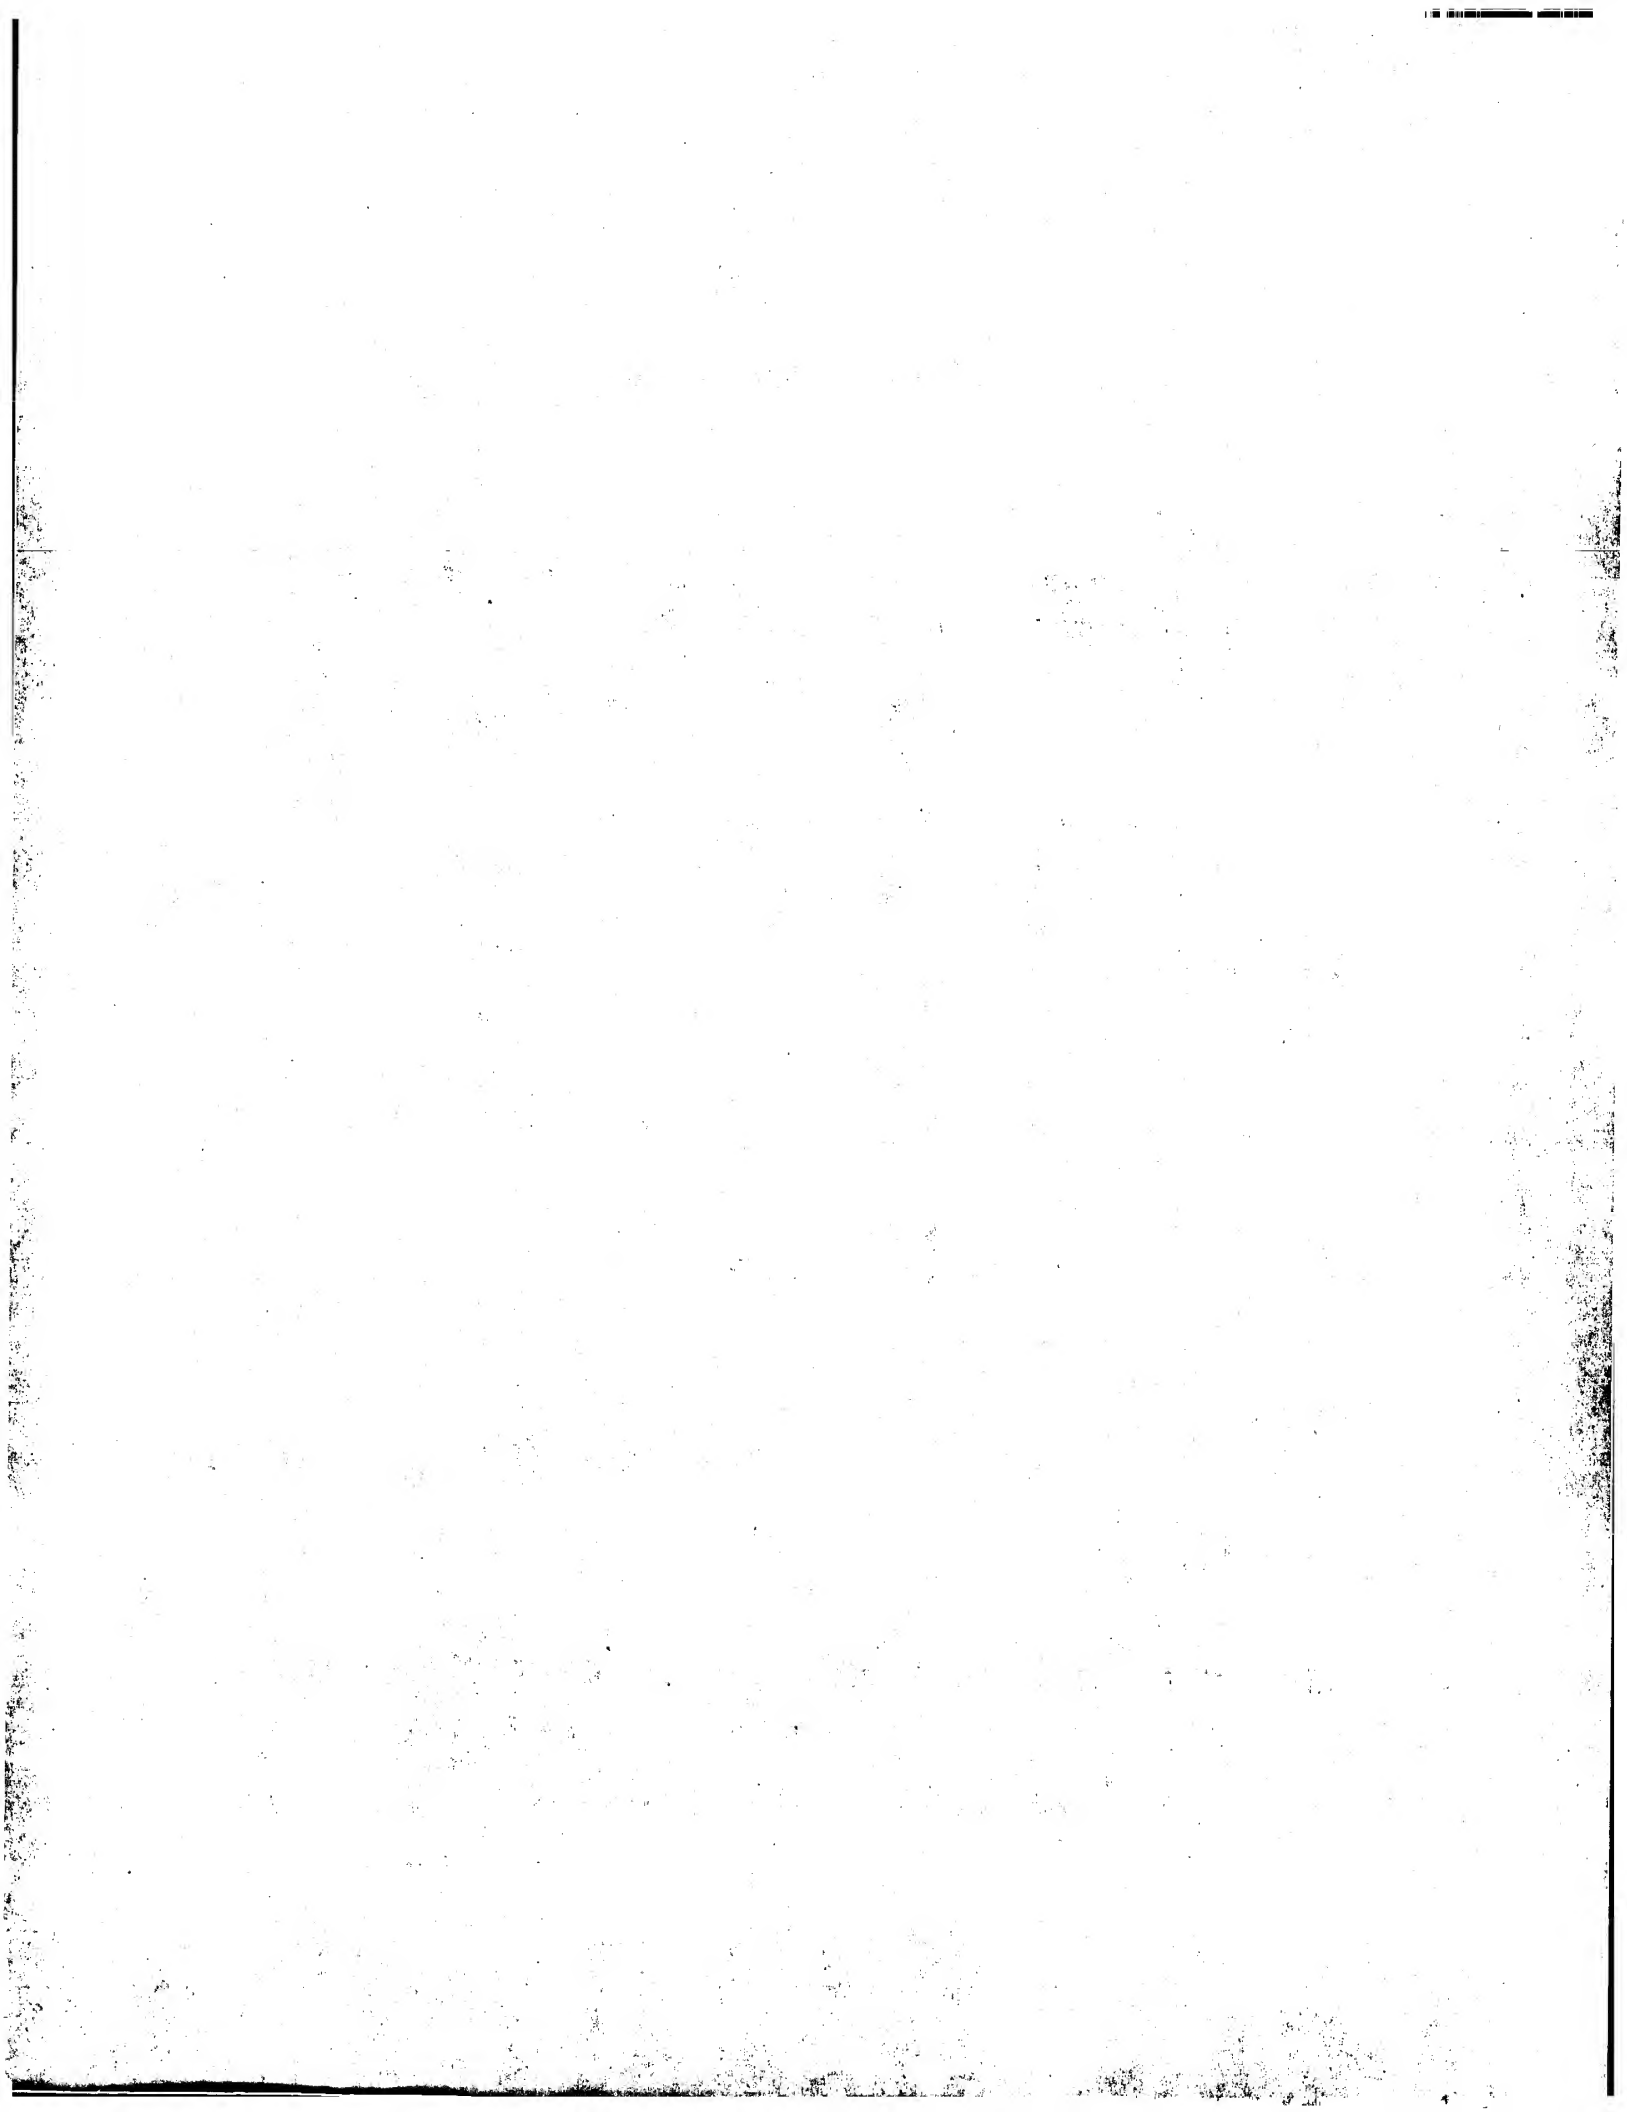



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification<sup>6</sup>:

D21F 11/00

A1

(11) International Publication Number:

WO 96/02701

(43) International Publication Date:

1 February 1996 (01.02.96)

(21) International Application Number: PCT/SE95/00847

(22) International Filing Date: 12 July 1995 (12.07.95)

(30) Priority Data:

9402470-0

13 July 1994 (13.07.94)

SE

9402468-4

13 July 1994 (13.07.94)

SE

(71) Applicant (for all designated States except US): MÖLNLYCKE  
AB [SE/SE]; S-405 03 Göteborg (SE).

(72) Inventor; and

(75) Inventor/Applicant (for US only): REINER, Lennart [SE/SE];  
Ångomsvägen 22, S-864 33 Matfors (SE).(7) Agents: GRAUDUMS, Valdis et al.; Albihn West AB, P.O.  
Box 142, S-401 22 Göteborg (SE).

(81) Designated States: AM, AT, AU, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LT, LU, LV, MD, MG, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TT, UA, UG, US, UZ, VN, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG), ARIPO patent (KE, MW, SD, SZ, UG).

Published


With international search report.

= 055,853,538

(54) Title: METHOD OF PRODUCING A NONWOVEN MATERIAL AND NONWOVEN MATERIAL PRODUCED ACCORDING TO THE METHOD

## (57) Abstract

Method of producing a nonwoven material by hydroentangling of a fibre web, whereby dry fibres, natural and/or synthetic, are metered into a dispersion vessel (111), possibly after pre-wetting, the fibres being dispersed in a foamable liquid comprising water and a tenside, for forming a foamed fibre dispersion, which is applied to a wire (118) and drained. The formed fibre web is subjected to hydroentangling directly after forming and the foamable liquid, after having passed through the wire, is recirculated to the dispersion vessel in a simple closed circuit.

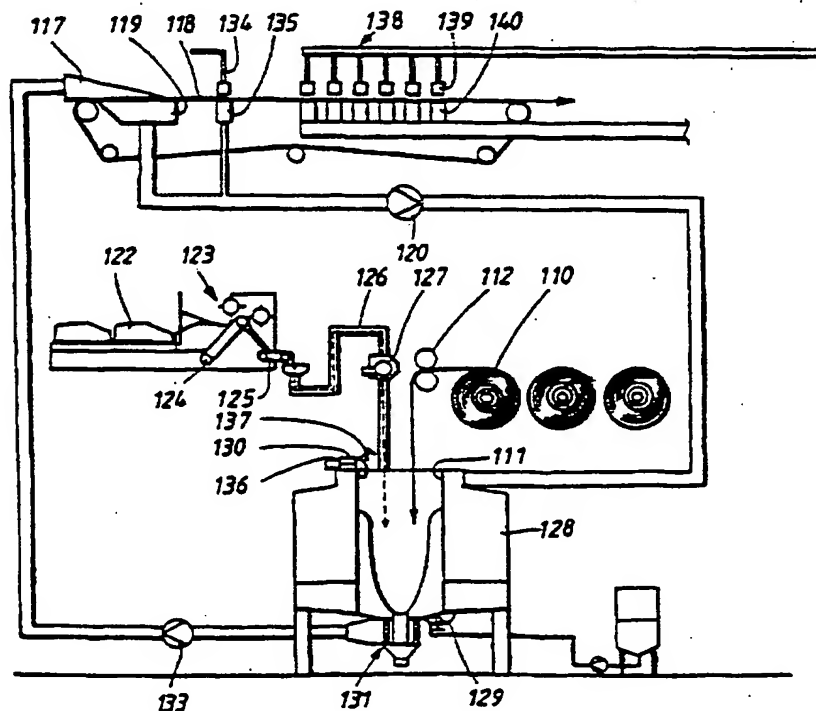

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

5     Method of producing a nonwoven material and nonwoven  
      material produced according to the method

10     Field of the invention

The present invention relates to a method of producing a nonwoven material by hydroentangling a fibre web, and to a nonwoven material produced according to the method.

15     Background to the invention

Hydroentangling or spunlacing is a technique which was introduced in the 1970's, see e.g. CA patent No. 841,938. The method involves forming a fibre web, either dry-laid or wet-laid, whereafter the fibres are entangled, i.e. tangled together by means of very fine water-jets under high pressure. A plurality of rows of water-jets are directed at the fibre web which is supported by a moving wire. The entangled fabric is then dried. The fibres which are used in the material can be constituted by staple fibres, e.g. polyester, rayon, nylon, polypropylene and the like, by cellulosic fibres or by mixtures of cellulosic and staple fibres. Spunlace material can be produced cheaply and presents high absorption characteristics. Amongst other things they are used as drying materials for households or industrial use and as disposable materials within the field of health-care etc.

35     Foam-forming techniques, i.e. where a fibre web is formed from a dispersion of fibres in a foamed liquid, are used today for the production of paper and other fibre-based nonwoven materials as well as for the production of glass-

fibre mats for compression molding of various products for use within i.a. the car industry. The technique is described i.a. in GB 1.329,409 and US 4,443,297. The thus-produced fibre webs present a high degree of uniformity in the fibre forming.

### Object and features of the invention

The object of the present invention is to achieve a simplified method of producing a nonwoven material with high absorption characteristics, strength and uniformity. This has been achieved by metering dry fibres, natural and/or synthetic, into a dispersion vessel, possibly after pre-wetting, and dispersing the fibres in a foamable liquid comprising water and a tenside for forming a foamed fibre dispersion, whereupon the whereupon the foamed fibre dispersion is disposed on a wire and drained, and by the formed fibre web being subjected to hydroentangling directly after forming, and in that the foamable liquid, after having passed through the wire, is recirculated to the dispersion vessel in a simple closed circuit.

By this method, a flexible, space-saving and energy-economical process has been achieved, with which spunlace material of a surprisingly high quality can be produced.

### Description of the drawings

The invention will now be described in more detail with reference to two embodiments shown in the accompanying drawings.

Fig. 1 is a flow diagram of the method according to the invention.

Fig. 2 shows a modified design of the dispersion vessel and the foam tank.

Description of embodiments

Fig. 1 shows a process solution for a foam forming process according to the invention. The foam is generated by means of a tenside being added to the water in a pulper 111 where an intensive agitation and air intake occurs. Additional foam generation occurs in the process due to the turbulence which is created in the pumps as well as at the wire 118. A condition for foam generation is however that there is access to air.

The tenside can be of any suitable type; anionic, cationic, non-ionic or amphoteric. GB patent 1,329,409 describes tensides suitable for foam forming of fibre webs. There are however many other available tensides suitable for the purpose. The choice of tenside can for example be affected by factors like the chemical composition of possible other additives to the fibre furnish, like wet-strengtheners, binders, creping chemicals, etc.

A suitable tenside metering in order to achieve a relatively stable foam which is able to maintain a substantially uniform dispersion of fibres in the foam is adjusted for each individual case and is dependent on such factors as the type of tenside, the degree of hardness of the water, the water temperature as well as the type of fibres. A suitable tenside content in the water lies within the range 0,02-1,0 weight-%, preferably however below 0,2 weight-%.

The characteristics of the foam vary with the amount of bound air. At an air content of up to about 70-80 %, the air is present in the form of small spherical air-bubbles

surrounded by free water, so-called spherical foam. With larger air content the foam transforms into a so-called polyhedral foam where the water is present in the thin membranes between different air bubbles. The latter foam type means that the foam is very stiff and difficult to handle.

In a foam forming process, spherical foam is normally used, i.e. the air content lies between 40-70 %. The small air bubbles function as spacers between different fibres, at the same time as the higher viscosity compared with the water damps the turbulence in the liquid and reduces the collision frequency between various fibres and the flock formation caused hereby. The bubble size in the foam is affected by factors like the type of agitator in the pulper/foam generator 111, the agitation speed, as well as the amount and type of tenside. A suitable average diameter is between 0,02 and 0,2 mm.

In the shown embodiment a mixture of cellulose fibres and synthetic fibres is used. The cellulose fibres in the form of easily defiberizable rolled pulp 112 are metered down into the pulper/foam generator 111 at a controlled speed between a feeding roller pair 112 with combined surface weight meter, whereupon this is conveyed through a pre-wetting channel before it is coarsely shredded down into the pulper 111. The coarse shredding of the pulp occurs e.g. between a so-called spiked roller pair. The pre-wetting of the pulp with fresh water is desirable in order to facilitate the dispersion in the pulper. The pre-wetting channel and the coarse shredder have been omitted from the drawing for the sake of simplicity. In the case that the rolled pulp presents a generally uniform surface weight, the metering can occur merely via the feeding speed. Possible surface weight variations of the rolled pulp can also be compensated by varying the machine speed in the



paper machine so that the surface weight of the formed sheet is kept essentially constant.

5 The synthetic fibres are normally provided in the form of bales 122 which, in a known way, are opened by bale openers 123, metered by means of a corrugated belt 124 and disposed on a collection wire 125. The fibres are sucked from the collection wire through a blow line 126 and metered down into the pulper/foam generator 111 via a condenser 127.

10 Other equipment for metering the pulp fibres and synthetic fibres than that shown can of course be used.

15 In the shown embodiment, the same pulper is used for both fibre types, depending on the fact that these can require different processing or where it is desired to use different types of fibre for so-called multi-layer forming, which is described below.

20 The pulper/foam generator 111 is concentrically located within a larger tank, the foam tank 128. Whilst the pulper 111 is open upwardly, the foam tank 128 is closed. The two vessels communicate with each other via pipes 129, 130 at the bottom and the top.

25 An intensive dispersion and mixing of the fibres occurs in the pulper/foam generator 111. At the same time, foam is generated with the assistance of the tenside which is in the water. In order to prevent the foam from rising  
30 upwardly and forming a growing foam layer on the top, it is important to maintain a foam circulation between the top and bottom of the pulper/foam generator 111. With a suitably designed rotor aggregate 131 a fully formed vortex is obtained, which gives the desired circulation. The  
35 pulper volume is adapted in order to be able to even out

rapid variations in the fibre metering. A suitable fibre concentration is 0,1-1,5 weight-%.

5 The air content in the foam can be measured by weighing a known volume of foamed fibre dispersion. This can occur by continually registering the weight of a certain length of the conduit between the pulper/foam generator 111 and the inlet box 117. Calibration of the measurement scale is effected due to the fact that the weight of said volume  
10 filled with the liquid in question, without mixing of air, corresponds to 0 % air, whilst the same volume filled only with air corresponds to a 100 % air content. Adjustment of the air content can occur for example by means of the addition of tenside, the agitation speed in the pulper/foam  
15 generator 111 and/or in that compressed air is released into the pump 133.

The foam with included fibres is pumped into the inlet box 117 on a paper machine with the aid of a suitable pump 133,  
20 said machine in the shown example being of Fourdrinier-type. The type of paper machine is however of secondary importance for the invention which can also be used on, for instance, suction breast roller machines and double wire machines. The pump should be able to cope with large  
25 amounts of air and at the same time be able to handle long synthetic fibres where these are present, without spinning effects occurring. Several different pump types fulfil these requirements. One example is a conventional piston pump. Another is a vacuum pump of the water-ring type, e.g.  
30 of the Helivac-make manufactured by Berendsen Teknik AS. An additional example is a pump type manufactured by Discflo Corp., which has a rotating disc pack with radial gaps.

35 In the depicted embodiment, the inlet box 117 and the suction box 119 can be considered as an integrated unit. The forming of the fibre web is completely closed, i.e.

there is no free fluid surface. A dewatered and ready-formed sheet comes out of the inlet box 117.

5 The foam - fibre dispersion is divided over the width of the machine to the inlet box 117 and fills the space which is delimited by the end walls of the inlet box and the downwardly sloping upper portion. The foam is sucked through the wire 118 with the aid of the vacuum pump 120 and that remaining on the wire becomes the ready-formed  
10 sheet.

It is also imaginable to use so-called multi-layer forming with different fibre types/mixtures in different layers. The various fibre types are then fed separately up to the  
15 inlet box which, in this case, is of multi-layer type.

In order to maintain the water balance in the system, the water which disappears with the sheet after forming has to be replaced. One way of doing this is by means of a spray  
20 134 across the formed fibre web. The spray 134 serves moreover as a washing zone in order to minimize the content of tenside in the formed sheet before hydroentangling. Addition of the fresh water can also occur at different locations in the system, e.g. at the pre-wetting stage. A  
25 separate suction box 135, but one which is coupled to the same circulation stage as above, supplies make-up water to the foam tank 128.

30 The foam which is sucked through the wire 118 is conveyed via suction box 119 and the vacuum pump 120 to the top of the foam tank 128. An unavoidable amount of leakage air is also conveyed with the foam. The foam tank 128 functions as a buffer tank for the foam.

35 The foam which is deposited in a vessel will slowly transform from spherical foam into polyhedral foam, said

5 foam types having been described above. In the foam tank 128 the liquid will thus be drained to the bottom of the tank, whilst the lighter foam is accumulated at the top of the tank. The tenside is accumulated in the contact surface between the air and the water. It is therefore likely that the tenside will tend to remain in the lighter foam and thus be concentrated towards the top of the tank.

10 The liquid phase in the bottom of the foam tank 128 runs over to the pulper 111 via the communicating pipe 129 in the bottom of the tank. In the same way the foam at the top of the foam tank 128 will be forced out via the pipe 130 in the top of the tank due to the over-pressure which is created by the vacuum pump 120. This light foam is very  
15 stable and, above all, voluminous and therefore has to be reduced before it is released down into the pulper 111. A high speed propeller 136 mounted in the tube 130 mechanically breaks up the larger air containment and releases a part of the large amount of air which is bound.

20 A control valve 137 is also arranged in the upper connection pipe 130 between the foam tank 128 and the pulper 111, with the help of which valve the pressure in the foam tank 128 and thereby also the level in the pulper  
25 111 can be kept constant.

30 By means of the described arrangement, a closed foam loop is obtained which is opened in a controlled manner between the foam tank 128 and the pulper 111. The volume of the foam tank should be dimensioned so that the residence time of the foam in the tank is about 45-180 seconds, preferably 60-120 seconds. A large portion of the liquid content will then be able to drain to the bottom of the tank 128 and thereafter run over to the pulper. At the same time the  
35 tank has to be able to contain the lighter foam in the upper part of the tank. A suitable ratio between total

volume and the expected liquid volume in the tank is about 4-8, preferably about 6.

5 The foam thus circulates between the pulper/foam generator 111, the inlet box 117, the wire 118, the suction box 119 and back to the pulper/foam generator 111 via the foam tank 128 in one simple circulation step. A certain addition of tenside and water occurs in order to replace the amount  
10 which follows along with the sheet after forming. Make-up water addition can for example be controlled by measuring the differential pressure in the foam tank 128. The tenside content in the foamed fibre dispersion is suitably determined by a surface tension meter.

15 The pulper/foam generator 111 and the foam tank 128 do not of course have to be arranged as an integrated unit, but can be arranged separate from one another as shown in Fig. 2. However, even in this case, they communicate with each other via pipelines 129 and 130. As mentioned above, the  
20 system may also comprise two or more pulpers/foam generators which can all still communicate with the same foam tank.

25 The formed fibre sheet is hydroentangled directly after forming in an entangling station 138, whilst it is still being supported by the wire 118. The entangling station 138 comprises a plurality of rows of nozzles 139, from which very fine water jets under high pressure are directed towards the fibre web and cause an entangling of this, i.e.  
30 a tangling together of the fibres. A suitable pressure is adjusted in the entangling nozzles depending on the fibre material, surface weight, etc.

35 For a further description of hydroentangling - or that which is also called the spunlacing technique, reference is made to i.a. CA-patent 841 938.

The entangled fibre web is dewatered over suction boxes 140 and is then conveyed to a drying station for drying, prior to the final material being rolled up.

5 The water from the entangling nozzles is removed via suction boxes 140 and pumped to a water purification process, whereupon it is recirculated to the entangling station 138. The described plant is an in-line plant where the foam-formed fibre web which constitutes the base  
10 material for the hydroentangling is entangled directly after the foam forming, either by using the same wire 118 as shown in Fig. 1, or with different wires for foam forming and hydroentangling, for example in the case where it is desired to produce a material patterned with holes in  
15 connection with hydroentangling. The material is preferably entangled from both sides.

The formation of the foam-formed fibre web can of course occur with other process solutions than the one shown here.  
20 Examples of other such processes are disclosed in e.g. GB 1,329,409 and US 4,443,297.

Fibres of many different types and in different mixing ratios can be used. Mixtures of pulp fibres and synthetic  
25 fibres, e.g. polyester, polypropylene, rayon, lyocell (viscose), etc., can thus be used. As an alternative to synthetic fibres, natural fibres with long fibre length, over 12 mm, can also be used, such as seed hair fibres, e.g. cotton, kapok and milkweed; leaf fibres, e.g. sisal,  
30 abaca, pineapple, New Zealand hemp; and bast fibres, e.g. flax, hemp, ramie, jute, kenaf. Varying fibre lengths can be used and, with a foam forming technique, longer fibres than those which are possible with conventional wet laying of fibre webs can be used. Long fibres, circa 18-30 mm, are  
35 advantageous for hydroentangling since they increase the strength of the material, in both wet as well as dry

conditions. An additional advantage with foam forming is that it is possible to produce material with lower surface weight than that which is the case with wet laying. As a replacement for pulp fibres, plant fibres with short fibre length can be used, such as esparto grass, *phalaris arundinacea* and straw from crop seed.

With certain types of fibres, a binder may be desirable in order to give additional strength to the material. Suitable binders include starch-based binders, polyvinyl-alcohol, latex, etc., which are used in order to increase the strength of nonwoven materials.

#### Example 1

A run was made on a Fourdrinier machine having a machine speed of 20m/min with use of a fibre mixture consisting of 50% pulp fibres of bleached conifer-sulphate and 50% polypropylene fibres 1,4 dtex/18 mm. A fibre dispersion having a fibre concentration of 0,34 weight-% was prepared in a pulper, to which was also added a non-ionic tenside at a concentration of 0,06%. The residence time in the pulper was 34 secs. The air content in the foamed fibre dispersion which was conveyed to the inlet box was 54%. The dry content of the formed fibre web was 30%. Immediately after forming this was subjected to double-sided hydroentangling, i.e. the fibre web was entangled from both sides. The number of entangling strips was 3 pieces/passage. The hole diameter of the nozzles was 120µm and the number of holes 1700/m. The entangling pressure was 95 bar. The entangled fibre web was pressed and dried with hot air at 100°C.

The characteristics of the produced material are shown in Table 1.

Example 2

5 A second run was made using a fibre mixture consisting of  
70% pulp fibres of bleached sulphate and 30% polypropylene  
fibres 1,0 dtex/18 mm. The fibre concentration was 0,20  
weight-%. The tenside addition was the same as in Example  
1. The residence time in the pulper was 40 secs. and the  
10 air content in the foamed fibre dispersion which was  
conveyed to the inlet box was 53%. Entangling was carried  
out in a manner corresponding to that in Example 1.

The characteristics of the produced material are shown in  
Table 1.

15 Example 3

A third run was made using a fibre mixture consisting of  
50% pulp fibres of bleached conifer-sulphate and 50% Tencel  
fibres (lyocell) 1,7 dtex/12 mm. The fibre concentration  
was 0.36 weight-% and the residence time in the pulper 26  
20 secs. The air content of the foamed fibre dispersion which  
was conveyed to the inlet box was 51%. Entangling was  
carried out in a manner corresponding to that in Example 1.

25 The characteristics of the produced material are shown in  
Table 1.

Example 4

30 An additional run was made using a fibre mixture consisting  
of 60% pulp fibres of bleached conifer-sulphate and 40%  
Tencel fibres 1,7 dtex/12 mm. The fibre concentration was  
0.18 weight-% and the residence time in the pulper 27 secs.  
The air content of the foamed fibre dispersion which was  
conveyed to the inlet box was 49%. Entangling was carried  
out in a manner corresponding to that in Example 1.

35



Table 1

	Ex. 1 50/50 pulp/ PP 1.4x1	Ex. 2 70/30 pulp/ PP 1.0x18	Ex. 3 50/50 pulp/ Tencel 1.7x12	Ex. 4 60/40 pulp/ Tencel 1.7x12	
5					
	Surface wt. g/m <sup>2</sup>	79	43	74	39
10	SCAN-P 6:75				
	Thickness $\mu$ m	486	326	362	299
15	SCAN-P 47:83				
	Fracture extension L %	67	22	14	22
20	SCAN-P 38:80				
	Fracture extension T %	118	115	42	50
25	SCAN-P 38:80				
	Strength in tension dry L N/m	3061	1037	3036	890
30	SCAN-P 38:80				
	Strength in tension dry T N/m	955	139	711	368
35	SCAN-P 38:80				
	Strength in tension wet L N/m	2099	128	2605	350
40	SCAN-P 58:86				
	Strength in tension wet T N/m	358	18	627	174
45	SCAN-P 58:86				
	Absorption 5 secs. g/g	4.2	4.9	3.6	4.9
50	SIS 25 12 28 (mod.)				
	Total absorption g/g	4.2	5	3.6	4.9
55	SIS 25 12 28 (mod.)				
60					

5

Claims

1. Method of producing a nonwoven material by hydroentangling of a fibre web,  
10 c h a r a c t e r i z e d in that dry fibres, natural and/or synthetic, are metered into a dispersion vessel (111), possibly after pre-wetting, and in that the fibres are dispersed in a foamable liquid comprising water and a tenside for forming a foamed fibre dispersion, whereupon  
15 the foamed fibre dispersion is applied to a wire (118) and drained, and in that directly following the forming, the fibre web is subjected to hydroentangling, and in that the foamable liquid, after having passed through the wire, is recirculated to the dispersion vessel in a simple closed  
20 circuit.

2. Method according to claim 1,  
c h a r a c t e r i z e d in that, apart from the fibres, only fresh water, tenside and possibly other chemicals are  
25 added to the closed circuit of the carrier medium, in order to replace the amount which has left the closed circuit with the fibre or paper web after forming.

3. Method according to claim 2,  
30 c h a r a c t e r i z e d in that the fresh water is sprayed (134) on to the formed fibre web before hydroentangling, and in that it is supplied to the closed circuit via a suction box (135) after having passed through the fibre web.

35

4. Method according to any one, or any, of the preceding claims, characterized in that the foamed liquid which is removed through the wire (118) is conveyed to a closed foam tank (128), in which a draining of liquid to the bottom of the foam tank occurs, whilst the lighter foam is collected in the top of the foam tank, and in that liquid from the bottom of the foam tank is led to the dispersion vessel (111) via a first pipeline (129), and in that the foam passes to the dispersion vessel via a second pipeline (130) in the top of the foam tank where the fibres are added and dispersed in the foamable liquid.

5. Method according to claim 4, characterized in that the foam in, or close to, said second pipeline (130) is acted upon mechanically, so that larger air bubbles in the foam are broken up, whereby bound air is released from the foam.

6. Method according to claim 5, characterized in that the pressure in the foam tank (128) is kept substantially constant by means of a regulator valve (137) arranged in, or directly after, said second pipeline (130).

7. Nonwoven material, characterized in that it is produced by hydroentangling a foam-formed fibre web according to the method defined in claim 1.

8. Nonwoven material according to claim 7, characterized in that its fibres are constituted by natural fibres or mixtures of natural fibres and synthetic fibres.

9. Nonwoven material according to claim 8, characterized in that natural fibres with a length greater than 12mm are included in the material.

5

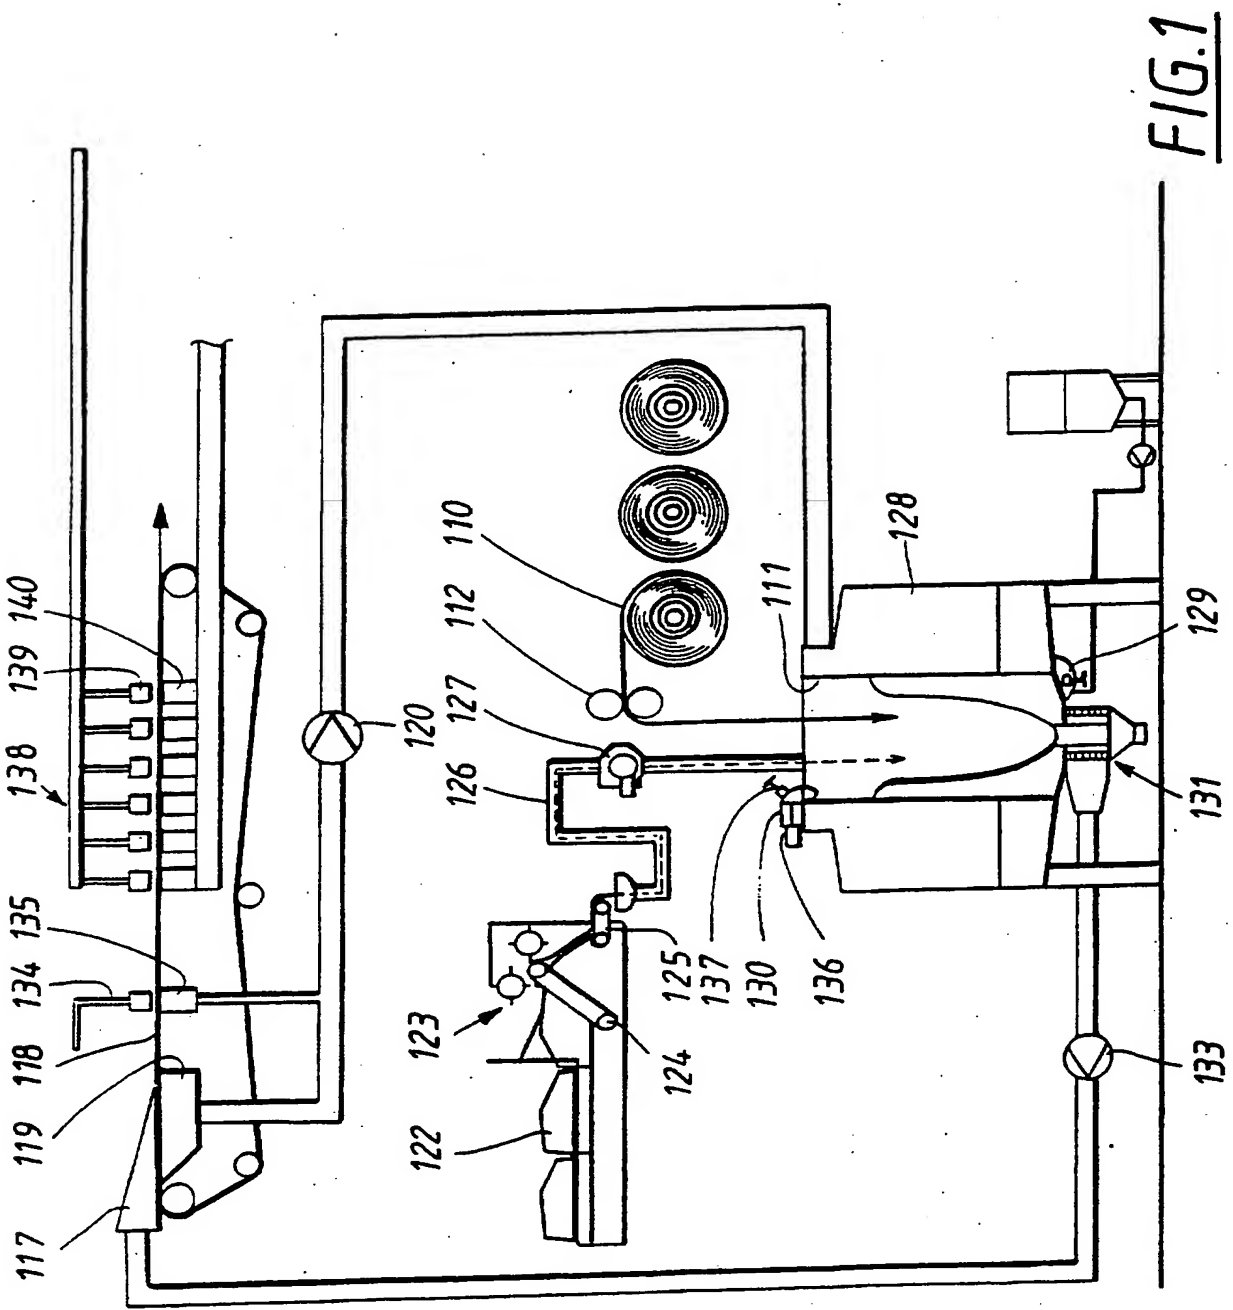


FIG.1

2/2

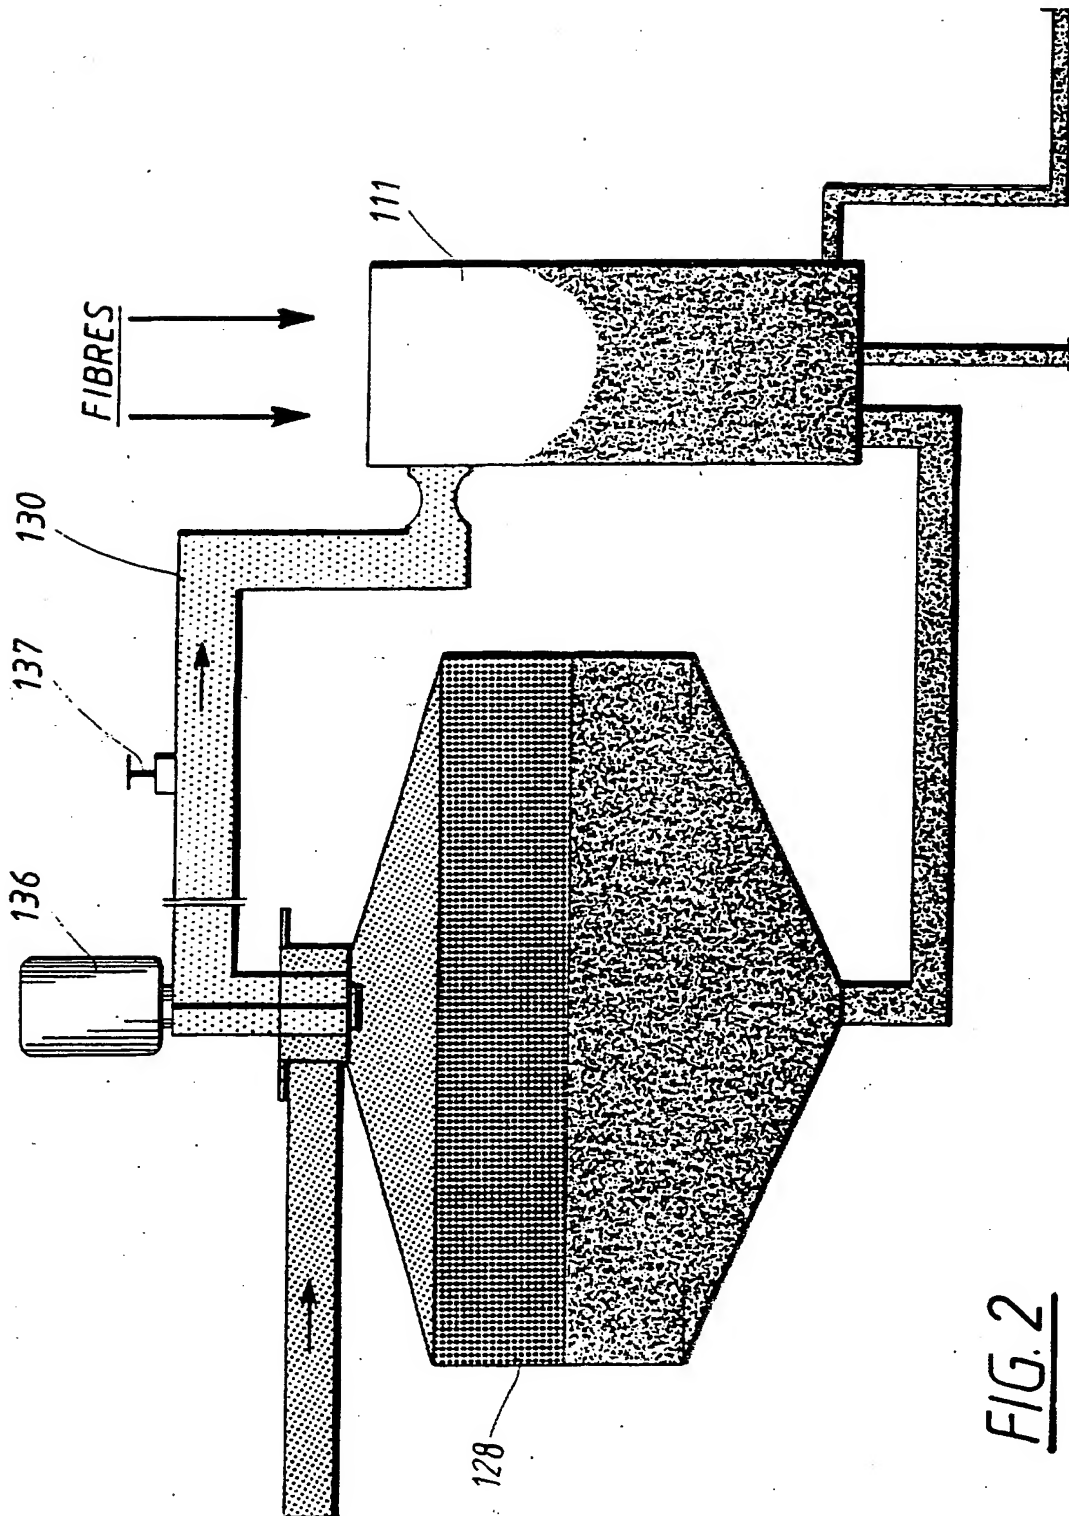


FIG. 2

**SUBSTITUTE SHEET**

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 95/00847

## A. CLASSIFICATION OF SUBJECT MATTER

IPC6: D21F 11/00

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC6: D21F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

DIALOG: ALLSCIENCE

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 4488932 A (ROBERT J. EBER ET AL), 18 December 1984 (18.12.84) --	1,7
A	US 5102501 A (ROBERT J. EBER ET AL), 7 April 1992 (07.04.92) --	1,7
A	US 5106457 A (JAMES H. MANNING), 21 April 1992 (21.04.92) -- -----	1,7

☐ Further documents are listed in the continuation of Box C.
 ☒ See patent family annex.

## \* Special categories of cited documents:

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

\*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*X\* document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\* document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

\*&\* document member of the same patent family

Date of the actual completion of the international search

19 October 1995

Name and mailing address of the ISA/  
Swedish Patent Office  
Box 5055, S-102 42 STOCKHOLM  
Facsimile No. +46 8 666 02 86

Date of mailing of the international search report

19 -10. 1995

Authorized officer

Olov Jensen  
Telephone No. +46 8 782 25 00

**INTERNATIONAL SEARCH REPORT**  
Information on patent family members

02/10/95

International application No.

PCT/SE 95/00847

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US-A- 4488932	18/12/84	CA-A- 1251978 EP-A, A, A 0101319 JP-C- 1698691 JP-B- 3060958 JP-A- 59053800 US-A- 5102501	04/04/89 22/02/84 28/09/92 18/09/91 28/03/84 07/04/92
US-A- 5102501	07/04/92	CA-A- 1251978 EP-A, A, A 0101319 JP-C- 1698691 JP-B- 3060958 JP-A- 59053800 US-A- 4488932	04/04/89 22/02/84 28/09/92 18/09/91 28/03/84 18/12/84
US-A- 5106457	21/04/92	EP-A- 0472355	26/02/92